



Appearance and Installation Dimension

Type	a	b	c	g	h	Φ
BSC1-N09~12	78	105	82	95	-	4.5
BSC1-N18	78	105	87	95	-	4.5
BSC1-N25	90	125	95	111	-	4.5
BSC1-N32	90	125	100	111	-	4.5
BSC1-N40~65	129	165	116	50	90	6.5
BSC1-N80~95	129	165	127	57	96	6.5

BX1-D  
Bobbin of AC Contactor




BX1-D2




BX1-D4

Specifications

BX1-D2	Used for Contactor	BSC1-D09 to BSC1-D18
BX1-D4	Used for Contactor	BSC1-D25 to BSC1-D32
BX1-D6	Used for Contactor	BSC1-D40 to BSC1-D95
BX1-FF	Used for Contactor	BSC1-D115 to BSC1-D150
BX1-FG	Used for Contactor	BSC1-D185 to BSC1-D225
BX1-FH	Used for Contactor	BSC1-D265 to BSC1-D330
BX1-FJ	Used for Contactor	BSC1-F400
BX1-FK	Used for Contactor	BSC1-F500
BX1-FL	Used for Contactor	BSC1-F630
BX1-FK(1)	Used for Contactor	BSC1-F780

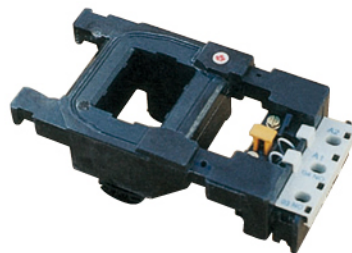

BX1-FK



BX1-FJ